

ALUJET Fixroll 3D

Product description

- ▶ The ALUJET Fixroll 3D is used to create rain-proof bonds with rising components such as walls and chimneys on pitched roofs. It consists of a composite aluminium butyl material with a 3-dimensionally embossed aluminium.

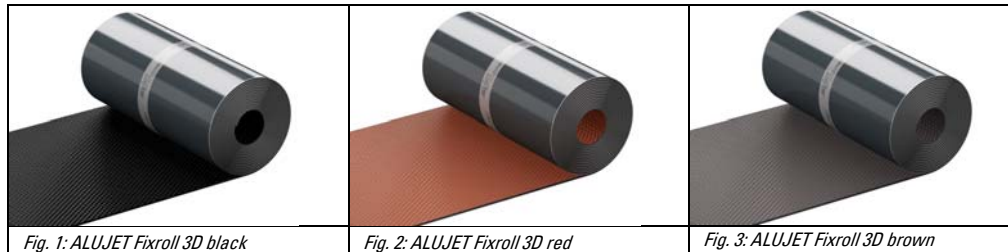


Fig. 1: ALUJET Fixroll 3D black

Fig. 2: ALUJET Fixroll 3D red

Fig. 3: ALUJET Fixroll 3D brown

Product benefits

- ▶ 3-dimensionally embossed aluminium; Split separating liner; UV-resistant

Technical data

Prüfung	Norm	Einheit	Wert
Outer Material			Aluminium
Adhesive			Butyl
Thickness of aluminium		mm	approx. 0,14
Thickness of butyl		mm	approx. 1,0
Temperature resistance		°C	-40 to +80
Processing temperature		°C	+5 to +50
Adhesive			Full surface
Liner			2-part

Specification

- | | | | |
|------------------|-----------|-----------|-----------|
| Colour: | Black | Red | Brown |
| Rollenwidth: | 300 mm | 300 mm | 300 mm |
| Rollenlength: | 5 m | 5 m | 5 m |
| Carton content: | 1 roll | 1 roll | 1 rolls |
| Palette content: | 120 rolls | 120 rolls | 120 rolls |

Storage

- ▶ Without exposure to UV radiation, as this could permanently reduce the properties of the material.

Processing

▶ Before installation, ensure that the substrate has no dust, grease and moisture. Always start laying from the eaves going towards the ridge (rainproof overlap) with an overlap of at least 10 cm.

Firstly, the right length is cut with scissors or a knife, then the ALUJET Fixroll 3D is edged as per requirements and adjusted to the rising component. Half of the butyl adhesive with its adhesive underside is exposed (separated liner). The ALUJET Fixroll 3D is first fastened to the rising component, then the liner is removed from the section intended for the roof surface and fastened to the highest point of the roof covering. The shape of the material can now be adapted to the roof covering using appropriate tools (driftwood etc.).

Basically, the bond to the rising material must be mechanically fastened and must be rainproof. If no facing is done, rainproofing must be done using end flashing etc.

Notes



Our instructions for use, guidelines for use, product and service information and other technical specifications only serve as a guide, they only describe the properties of our products (value specifications/determinations at time of production) and services and do not constitute guaranteed characteristics. Owing to the wide-ranging areas of application of the individual products and the particular conditions (e.g. usage parameters, material properties etc.), it is incumbent on the user to test our products. Our applications engineering consulting - whether verbal, in writing or by way of tests is offered free of charge and is not legally binding.